SANREMO
COFFEEMACHINES

THE BRAVE INSPIRE

General Catalogue

_____ USA 2022 _____

_ Index

Sanremo	_02
Coffee Machines	_04
Opera 2.0	_06
Café Racer	_14
F18	_22
F18 SB	_26
Zoe Competition	_30
Cube	_32
You	_36
Grinders	_42
AllGround	_44

THE BRAVE INSPIRE

PIONEERS OF A NEW VISION

A broad vision. A horizon defined by a high and ambitious goal, to be contemplated and then achieved, to be admired and eventually conquered.

Be inspired, take a deep breath then go:
start your adventure.

Because courage is not the absence of fear,
but the ability to conquer it.

SANREMO
COFFEEMACHINES
made in italy

SANREMO, MORE THAN A COMPANY

A benchmark for innovation and excellence in espresso coffee machines production Made in Italy; an inspirational brand for coffee lovers who celebrate the art of coffee extraction.

This is Sanremo: A fusion of a strong production tradition and ambitious dreams. A winning combination that has given the company international recognition and is now a point of reference in the coffee machine sector.

Our production department is second to none, our technological know-how, mixed with quality materials, workmanship and creativity.

An international research & development team, trained by the best in the coffee industry united with the same fighting spirit which Sanremo machines express.

Coffee Machines

Opera 2.0

Opera. The full story.
Watch the video.

SANREMO
OPERA 2.0
THE REVOLUTION

c UL us LISTED

_Versions

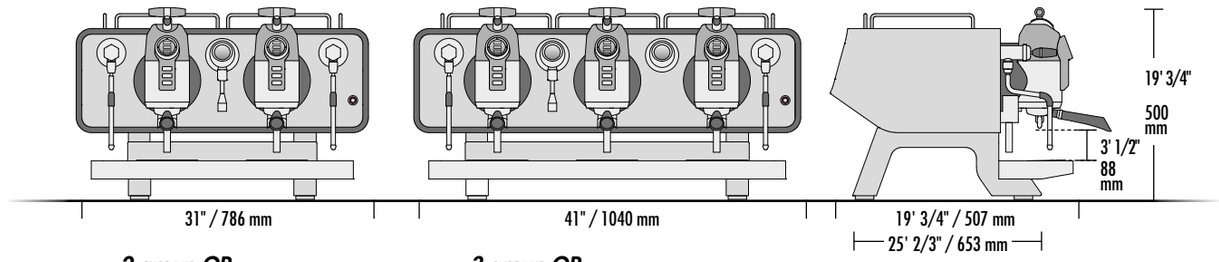

2 group OP
2 steam taps
1 water tap
1 one-cup filter hoder
2 two-cup filter hoders

3 group OP
2 steam taps
1 water tap
1 one-cup filter hoder
3 two-cup filter hoders

CE

TALL VERSION

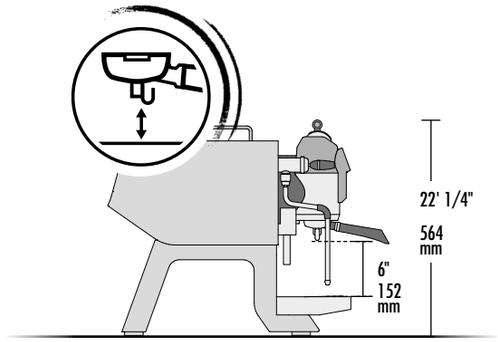

_Technical data

		2 group	3 group
voltage	V	208-240V~ 60Hz 1PH	
max input boiler/steam boiler's resistor power	kW	5.75 - 7.70 / 3.5	6.85 - 8.75 / 3.5
		6.75 - 8.50 / 4.5	7.85 - 9.20 / 4.5
steam boiler services	lt	8	10
external pump power	kW	0.15	0.15
preheating boiler capacity	lt	2.8	2.8
preheating boiler resistance power	kW	1.5	1.5
cup-heater power	kW	0.20	0.25
units boiler capacity	lt	1.0	1.5
units boiler resistance power	kW	1.6	2.4
net weight	lb / kg	200 / 91	249 / 113
gross weight *(with shipping crate)*	lb / kg	308 / 140	375 / 170.5

MULTIBOILER SYSTEM

High accuracy thermal stability thanks to the Sanremo multiboiler system with sophisticated electronic boards that continuously control temperature throughout all phases of extraction. Steam and coffee circuits work totally independent to maximize performance in every working condition (also under high workload).

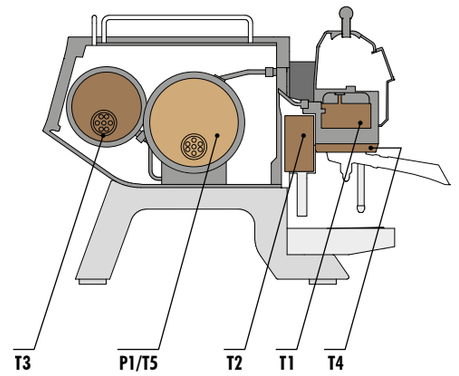

_The Revolution

Be in control, express yourself

TAME IT WITH ONE FINGER
Easy-touch setting with 6 different profiles for individual groups

SMART LEVER
Coffee doses fast manual selection

CDS SYSTEM
Maximum precision and full control on the three phases of coffee extraction

POWER DRY STEAM
Silky milk at high capacity

GEAR PUMP PERFORMANCE
High and constant pressure in all conditions

EVERYTHING UNDER CONTROL
System digital display to provide visibility of all working parameters

HEART OF STEEL
For maximum thermal stability:
- *Groups in AISI 316L weight 22 lb / 10 kg each*
- *Portafilters AISI 316*
- *Boilers AISI 316*

WI-FI CONNECTION

EASY APP
Tablet or smartphone barista's Webapp for setting parameters

Opera. The Revolution.
Link to the website

_Characteristics

AISI 316L **STEEL GROUPS WITH 22 lb / 10 kg PURE STEEL**
Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.

AISI 316 **STAINLESS STEEL PORTAFILTER WITH "COMPETITION FILTER"***
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

AISI 316L **STAINLESS STEEL FREE MOTION STEAM TAPS**
Flexible control system for producing and dispensing steam.

AISI 316L **STAINLESS STEEL STEAM WAND "COOL TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art"** high-performance steam terminals.

CONTROL COFFEE DELIVERY SYSTEM (CDS)
Three phases extraction parameters full control (pre-infusion, infusion, post-infusion).

INDEPENDENT ADJUSTMENT OF THE PID INFUSION WATER TEMPERATURE
Precision setting (gradient ± 0.1°C with measured constancy lower than 0.2°C).

INFUSION WATER DISPLAY
Indicates tea and herbal teas water brewing temperature.
(In the two group it is shown with the steam boiler display)

STEAM BOILER DISPLAY
Indicates steam boiler temperature and pressure.
(In the two group Opera it is shown with the infusion water display)

COFFEE UNIT SINGLE DISPLAY
Controls of all coffee extraction parameters.

MACHINE'S PROGRAMMING PARAMETERS DISPLAY
The internal display is a handy programming interface for the maintenance technician.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Instantaneous mixing of fresh water and steam for a better chemical and organoleptic quality.

GEAR PUMPS
Dedicated to each individual group, allow to change the pressure during infusion.

STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.

PROGRAMMABLE CUP WARMER TEMPERATURE
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE
Maintenance can be scheduled according to litres or number of coffees dispensed.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

_Optional

TALL VERSION

ENHANCED RESISTANCE

* **STAINLESS STEEL NAKED PORTAFILTERS**

** **HIGH POWER STEAMER TERMINAL** (bigger holes diameter)

EXTERNAL VOLUMETRIC PUMP

_ Standard models
wide range of models

Opera Black
Standard back panel: |BP1|

_ Choose the panel
to suit your style

BP1 Etched crystal / backlight

BP2 Painted wood

BP3 Steel oxidized / backlight

BP4 Black / backlight

BP5 Octane blue / backlight

Back panel of each version can be customized, with finishes that complement your style and needs.

OPERA 2.0
THE REVOLUTION

Opera Black
Standard back panel: |BP4|

Opera White
Standard back panel: |BP2|

_ Tailor made finishes
collection 2020

Opera Octane
Standard back panel: |BP6|

Opera Oxid
Standard back panel: |BP3|

_ Opera wi-fi
simplify things

Since today on the new Opera 2.0 is easier to handle, thanks to the ***Sanremo Cloud*** and ***Webapp Express yourself*** interface, for an even easier and interactive using experience.

- Handling through Sanremo Webapp, from smartphone, tablet, or pc, of all configuration parameters of the machine, without the need for physically being in front of it.

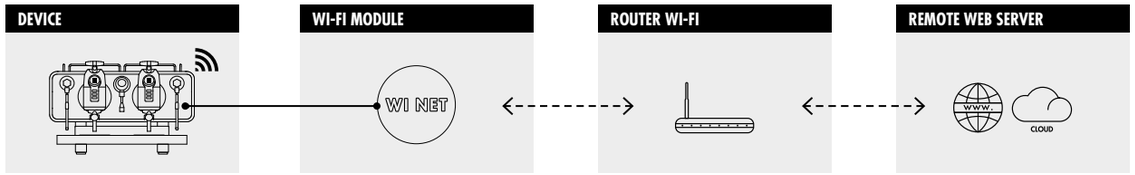

- Possibility of connecting multiple machines simultaneously for sharing, modifying, and setting of recipes and configurations.
- Simultaneous monitoring and handling of multiple machines by the same owner (e.g.: franchising in different locations).

- Statistical analysis of consumption, distribution, maintenance, configuration for all connected machines.
- Remote maintenance by the technician for updating, verification of the correct settings and parameters control.

_ Power Dry Steam
hight performance steam function

Opera guarantees high performance and **dry steam** thanks to the **electronic control system** through an advanced transductor.

Use the best Sanremo technology, with impeccable performance, to give free rein to your creativity:

- **dedicated steam boiler** (high capacity and fast recovery)
- **free motion steam taps**
- **cool-touch steam wand**

Café Racer

_Versions

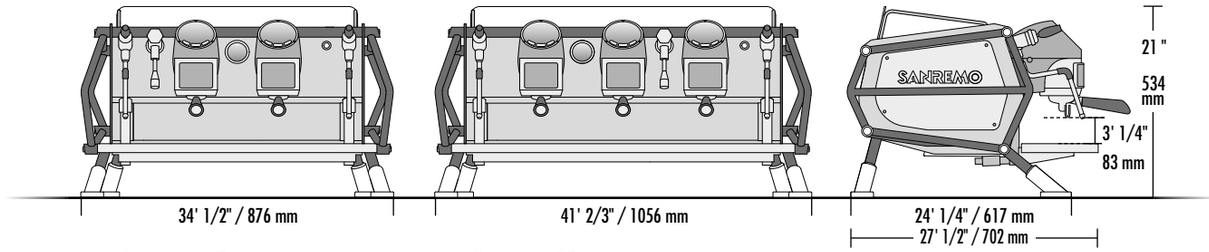

2 group CR

- 2 steam taps
- 1 water tap
- 1 one-cup filter hoder
- 2 two-cup filter hoders

3 group CR

- 2 steam taps
- 1 water tap
- 1 one-cup filter hoder
- 3 two-cup filter hoders

MULTIBOILER SYSTEM

Sanremo Café Racer multiboiler system ensures a new level of thermal precision thanks to the 4 points of temperature PID control.

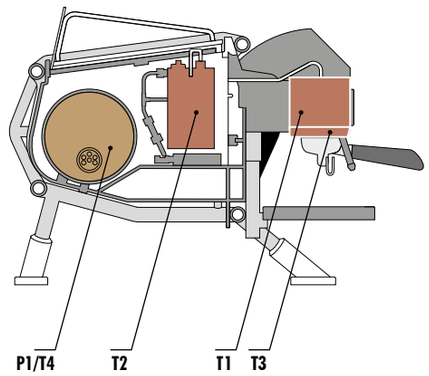

_Technical data

		2 group	3 group
voltage	V	208-240V~ 60Hz 1PH	
max input boiler/steam boiler's resistor power	kW	5.0 - 7.0 / 3.5	6.5 - 8.5 / 3.5
		6.0 - 8.0 / 4.5	7.0 - 9.3 / 4.5
steam boiler capacity	lt	8	10
external pump power	kW	0.160	0.160
preheating boiler capacity	lt	1.6	1.6
preheating boiler resistance power	kW	1.0	1.5
cup-heater power	kW	0.16	0.20
units boiler capacity	lt	1.0	1.5
units boiler resistance power	kW	1.6	2.4
net weight	lb / kg	214 / 97	265 / 120
gross weight *(with shipping crate)*	lb / kg	333 / 151	388 / 176

_Take a ride,
Explore it's soul

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

VOLUMETRIC PUMP PERFORMANCE
The unique 300 l/h pump guarantees constant pressure in all conditions of machine use

HIGH PERFORMANCE FLOWMETER VOLUMETRICS
For an accurate and precise coffee dose in the cup

STEAM PERFORMANCE
Silky milk at high capacity

EASY SERVICE
Fast access to the internal parts for quick and easy technical service

Café Racer, born to run.
Link to the website

EVERYTHING UNDER CONTROL
System digital display to provide visibility of all working parameters

Smart-touch setting of the individual groups

HEART OF STEEL
For maximum thermal stability:
- *Groups in AISI 316L, weight 17.6 lb / 8 kg each*
- *Portafilters AISI 316*
- *Boilers AISI 316*

ADJUSTABLE HEIGHT WORK SURFACE
Innovative Sanremo "All in one" suspension system that allows cups of different shapes and heights (adjustable from 3' 2/4" to 5' 3/4" / from 85 to 150 mm)

SOFT PRE-INFUSION
Flowactive System: for precise control of the water flow and pre-infusion time

_Characteristics

AISI 316L **STEEL GROUPS WITH 17.6 lb / 8 kg PURE STEEL**
Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.

AISI 316 **STAINLESS STEEL FILTER HODER WITH "COMPETITION FILTER"***
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

AISI 316L **STAINLESS STEEL FREE MOTION STEAM TAPS**
Flexible control system for producing and dispensing steam.

AISI 316L **STAINLESS STEEL STEAM WAND "COOL TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art"** high-performance steam terminals.

PROGRAMMABLE ELECTRONIC PRE-INFUSION
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.

INDEPENDENT ADJUSTMENT OF THE PID INFUSION WATER TEMPERATURE
Precision setting (gradient ± 0.5 °C with measured constancy lower than 0.2°C).

SYSTEM DISPLAY
Visibility of all the machine functions: temperatures, pressures and levels.

COFFEE UNIT SINGLE DISPLAY
Control of all coffee extraction parameters.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Instantaneous mixing of fresh water and steam for a better chemical and organoleptic quality.

HIGH PERFORMANCE VOLUMETRIC PUMP 300 l/h***
Pressure stability also with prolonged and contemporary use of more than one group.

HIGH PERFORMANCE FLOWMETER VOLUMETRICS
For an accurate and precise coffee dose in the cup.

STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.

PROGRAMMABLE CUP WARMER TEMPERATURE
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE
Maintenance can be scheduled according to litres or number of coffees dispensed.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

BOILER WATER REGENERATION
Ensures resetting of the optimum chemical characteristics of the water and correct mineralisation.

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

_Optional

* **STAINLESS STEEL NAKED FILTER HODERS**

** **HIGH POWER STEAMER TERMINAL** (bigger holes diameter)

*** **EXTERNAL VOLUMETRIC PUMP**

ENHANCED RESISTANCE

_ NAKED

Transparent side and back panels

black
both available with some components in black or red.*

** rings, bolts, feets, boiler insulation*

Naked Black
Black

Naked Black
Red

_ CUSTOM

*Welcome to the Custom world, greatest potential expression of the entire project named **"Cafè Racer"**: customization and uninterrupted evolution.*
Some versions have already become real icons.
Choose your style and get on your exclusive Cafè Racer.

_ Renegade

handmade finishes
Dark green
Oxidized copper
Brown leather
Polished brass
Oxidized brass

_ Dolomiti

hand-sewn
Matt black
Black steel
Black leather
Stainless steel

_White & Wood Standard

_ CUSTOM



Matt white
Natural oak
Stainless steel
Natural oak

_ White & Wood Slim



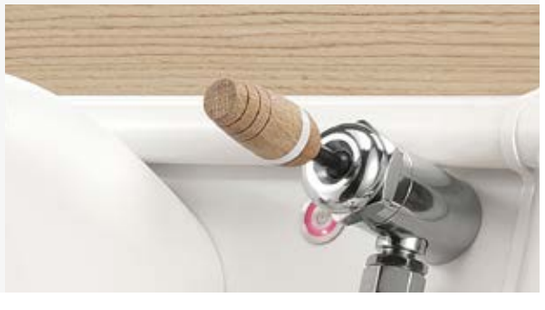

_ Black & White

_ CUSTOM

Matt white
Stainless steel

_ Full White

SANREMO F.18

_Versions

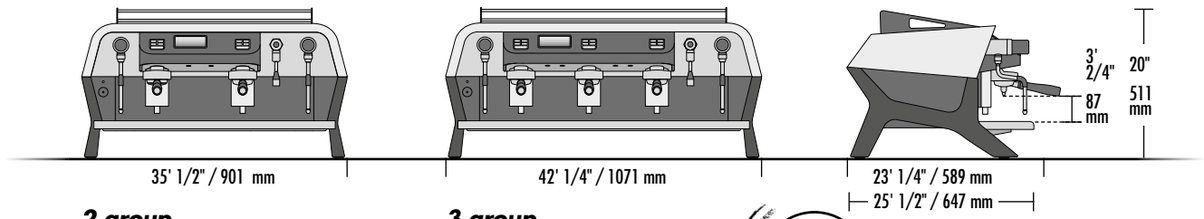

2 group
2 steam taps
1 water tap
1 one-cup filter hoder
2 two-cup filter hoders

3 group
2 steam taps
1 water tap
1 one-cup filter hoder
3 two-cup filter hoders

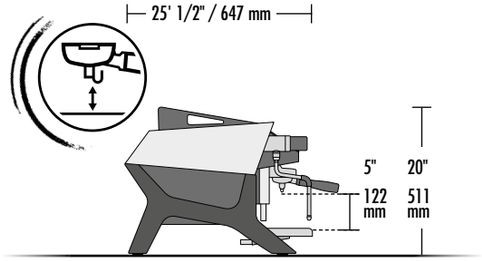

TALL VERSION
Available only upon request

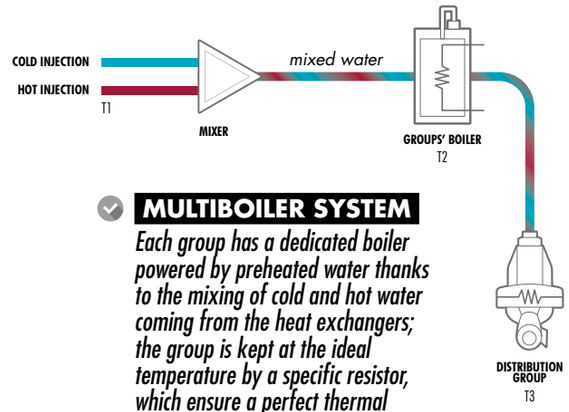

MULTIBOILER SYSTEM
Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.

CE

_Technical data

		2 group	3 group
voltage	V	208-240V~ 60Hz 1PH	
max input boiler/steam boiler's resistor power	kW	5.40 - 6.20 / 3.5	6.10 - 7.0 / 3.5
		6.32 - 7.25 / 4.5	7.20 - 8.30 / 4.5
steam boiler capacity	lt	8.6	10
pump power	kW	0.15	0.15
boiler capacity	lt	1	1.5
boiler element power	kW	1	1.5
cup-heater power	kW	0.20	0.25
net weight	lb / kg	182 / 82.5	222.5 / 101
gross weight *(with shipping crate)*	lb / kg	241.5 / 109.5	278 / 126

_Colors

	Matte black	RAL 9005
	White|Matte black	RAL 9003|9005

_ In flight stability

Ready to take off

QUICK STEAM COUPLING
The new half-turn knob allows extreme precision limiting physical stress

REALTIME STABILITY GROUP
Exclusive Sanremo design that allows an accurate maintenance of the set temperature

REALTIME STABILITY
Constancy in the electronic controlled temperature (± 0.2 °C)

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

STAINLESS STEEL "COLD TOUCH"
Anti-burning feature fitted with "Latte Art" high-performance steam terminals

OPERATION ALARM MANAGEMENT
Dedicated menù for malfunction and alarm records

SOFT PRE-INFUSION
Flowactive System: for precise control of the water flow and pre-infusion time

F18
Link to the website

Control panel:

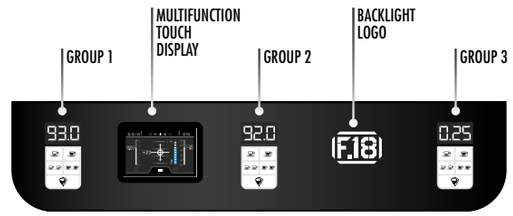

Tastiera 5 selezioni standard

Keyboard 7 selections optional

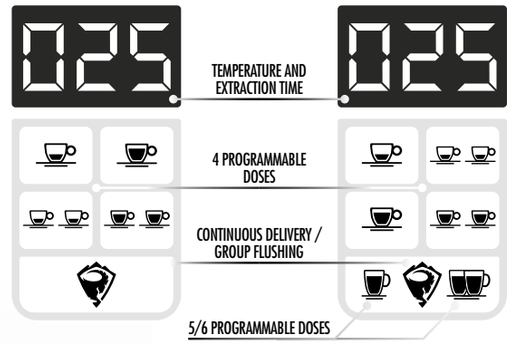

MULTIFUNCTION TOUCH DISPLAY

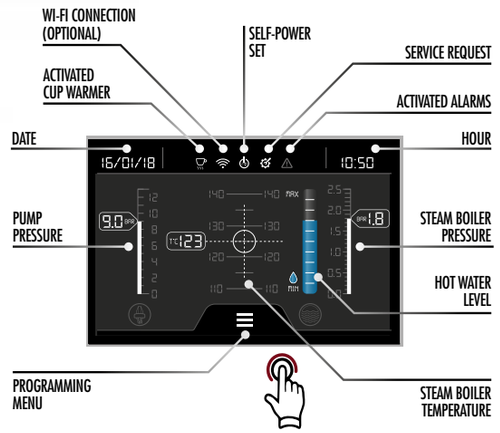

_Characteristics

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.

STAINLESS STEEL COFFEE BOILER
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

INDIPENDENT REGULATION TEMPERATURE WATER COFFEE
Maximum temperature precision and constancy of distribution.

PROGRAMMABLE ELECTRONIC PRE-INFUSION
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.

AISI 316L **STAINLESS STEEL STEAM WAND "COLD TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

PROGRAMMABLE CUP WARMER TEMPERATURE
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable on-off timer for each day and/or daily timetables.

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency.

REALTIME STABILITY GROUP
Exclusive Sanremo design that allows a precise maintenance of the set temperature.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

HIGH PERFORMANCE VOLUMETRIC PUMP
Pressure stability also with prolonged and contemporary use of more than one group.

COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

TEMPCONTROL
For a very-high thermal stability (± 0.2 °C).

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

_Optional

AUTOSTEAMER
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

EXTERNAL VOLUMETRIC PUMP

HIGH POWER STEAMER TERMINAL
(bigger holes diameter)

STAINLESS FILTER HODERS

STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.

F18 SB

_Versions

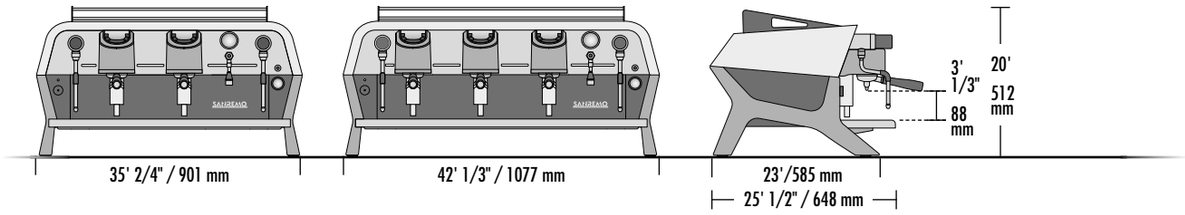

2 group

2 steam taps
1 water tap
1 one-cup filter hoder
2 two-cup filter hoders

3 group

2 steam taps
1 water tap
1 one-cup filter hoder
3 two-cup filter hoders

"TALL" VERSION

Available only upon request

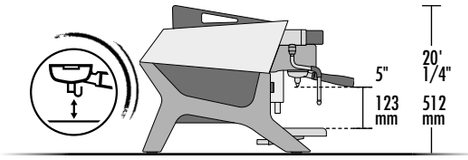

_Colours

■■	Matte black|Matte black	RAL 9004
■□	Matte black|Matte white	RAL 9004|9003

CE

_Technical data

		2 group	3 group
voltage	V	208-240V~ 60Hz 1PH	
max input boiler/steam boiler's resistor power	kW	2.60 - 3.20 / 2.7	4.90 - 5.70 / 5.1
		3.70 - 4.50 / 4.0	5.50 - 6.30 / 6.0
		4.30 - 4.50 / 4.5	
steam boiler capacity	lt	12	18
pump power	kW	0.15	0.15
cup warmer power	kW	0.20	0.25
net weight	lb / kg	172 / 78	211 / 96
gross weight (with shipping crate)	lb / kg	231 / 105	267 / 121

Control panel

(4 o 6 PROGRAMMABLE DOSES)

*Keyboard **5 selections***

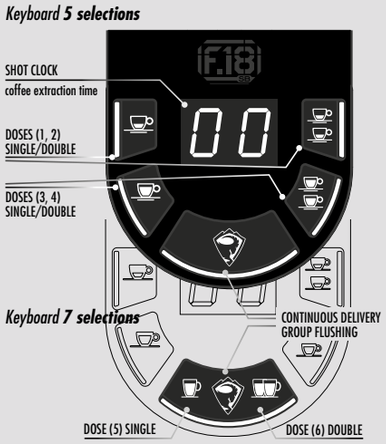

*Keyboard **7 selections***

GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature

QUICK STEAM COUPLING
The new half-turn knob allows extreme precision limiting physical stress

AUTOSTEAMER

FOAMING

STEAMING

AUTOMATIC CLEANING

HOT WATER

***Autosteamer** Version*

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

MULTIFUNCTION DISPLAY

ECO MODE

DIE-CAST ALUMINIUM LEGS
Machine support made in die-cast aluminium

IDLE MODE - TEMPERATURE

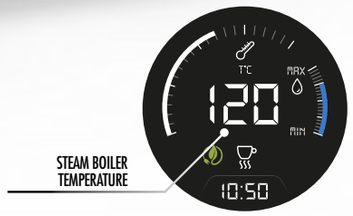

STEAM BOILER TEMPERATURE

FUNCTIONS

STEAM BOILER PRESSURE

STEAM BOILER WATER LEVEL

ACTIVATED CUP WARMER

DETECTED ALARM

ACTIVATED ECO MODE

REQUIRED SERVICE

ACTIVATED AUTOMATIC ON/OFF

CLOCK

F18 SB
Link to the website

_Characteristics

PRESSURE GAUGE
Allows to monitor the inlet and pump pressure during extraxtion.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible thanks to the PID algorithm.

DIE-CAST ALUMINIUM LEGS

MULTIFUNCTION DISPLAY
Allows to monitor the right functioning of the machine and to program the main functions.

PROGRAMMABLE ELECTRONIC PRE-INFUSION
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.

HIGH PERFORMANCE VOLUMETRIC PUMP
Pressure stability also with prolonged and contemporary use of more than one group.

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.

CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.
Power level programmable by user.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.
Cleaning cycles number programmable.

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable ON-OFF/ON-ECO timer for each day and/or daily timetables.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

_Optional

AUTOSTEAMER
Steam wand characterized by an electronic system which allows to froth milk and heat up beverages at a programmable temperature, different for every single function. Automatic cleaning cycle is included.

EXTERNAL VOLUMETRIC PUMP

COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

AISI 316L **STAINLESS STEEL STEAM WAND "COLD TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

NAKED FILTER HODERS

PAYMENT SYSTEM
RS-232 comunication protocol to manage cash register systems.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

ENHANCED RESISTANCE

Zoe Competition

COLORED AND VERSATILE
Totally matching every type of decorative solution thanks to the possible customizations

SHOT TIMER
To accurately and reliably time coffee extraction

LED LIGHTING OF THE WORKING AREA
Allows to effectively work in any light condition

EASY SERVICE
Fast access to the internal parts for quick and easy technical service

LOW SERVICE COST
Designed to decrease the maintenance and inspection costs

_Characteristics

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.

SHOT TIMER
To accurately and reliably time coffee extraction.

_Optional

AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.

EXTERNAL VOLUMETRIC PUMP

NAKED PORTAFILTERS

ENHANCED RESISTANCE

ZOE COMPETITION
SANREMO

c UL us LISTED

_Versions

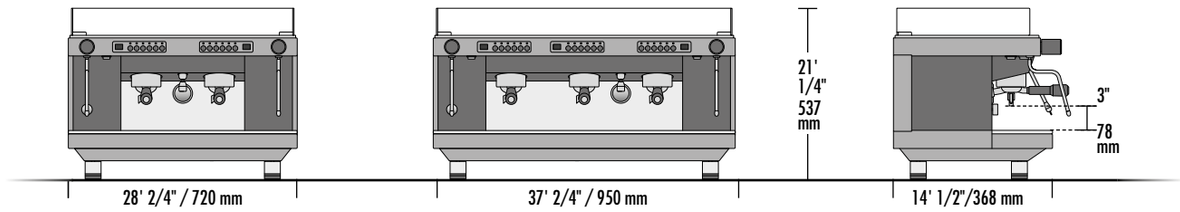

2 group
2 steam taps
1 water tap
1 one-cup filter hoder
2 two-cup filter hoders

3 group
2 steam taps
1 water tap
1 one-cup filter hoder
3 two-cup filter hoders



TALL VERSION
2-3 group

CE

_Technical data

		2 group	3 group
voltage	V	208-240V~ 60Hz 1PH	
max input boiler/steam boiler's resistor power	kW	3.35 - 3.85 / 2.70	6.05 - 6.95 / 5.10
steam boiler capacity	lt	9	12.5
pump power	kW	0.15	0.15
net weight	lb / kg	121 / 55	152 / 69
gross weight *(with shipping crate)*	lb / kg	130 / 59	161 / 73

Zoe Competition
Link to the website

_Colors

Black	RAL 9005
White|Black	RAL 9003|9005
White|Matte black	RAL 9003|9005

Customization of internal panels with graphics and colors (on request).

PERSONALISED GRAPHICS

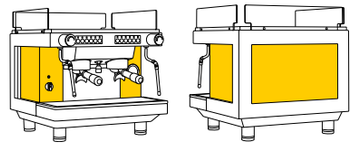

Cube

STEAMBOOSTER
Increase the power of the steam wand, improving performance

MAIN DISPLAY USER
Views:
-Boiler temperature (range 239/ 258,8°F)
- Extraction time
- Water level
- Malfunction

Settings:
Water filter expiration date (1-12 mths)

APP CONNECTION

LED INDICATORS

On/Off

At temperature

Water level alarm

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

PRESSURE GAUGE BOILER PRESSURE
Range 0–36 psi

PRESSURE GAUGE PUMP PRESSURE
Range 0–232 psi

_Characteristics

+ 1.9L boiler in AISI 316 stainless steel
+ 1.8L internal water tank
+ Water supply that can be selected from internal tank or mains
+ Thermosyphon unit with mechanical pre-infusion
+ Boiler power 1300W/120Vac
+ 54 L/h high performance volumetric pump
+ Selectable and programmable energy saving

Complete kit of useful accessories

_Versions

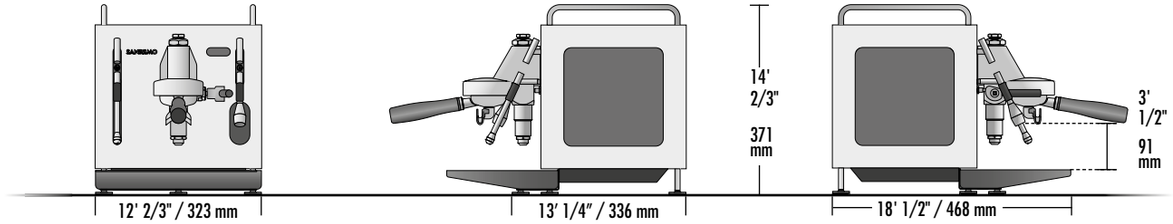

Weight ..... Kg 27,7 | 61 lbs

Cube
Link to the website

WiFi connection with Web App

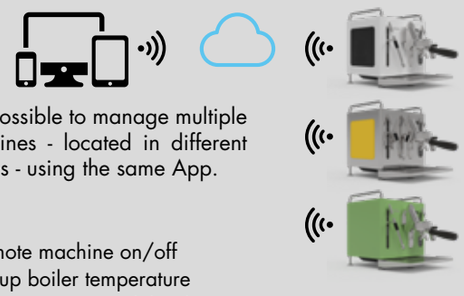

It is possible to manage multiple machines - located in different places - using the same App.

+ Remote machine on/off
+ Set-up boiler temperature
+ Manage water tank level
+ Enable and manage water filter signaling.
+ Show shot time in real time
+ Statistics: daily, weekly and monthly counters for coffee and water consumption.
+ Weekly scheduler to program up to three different “time slot” per day

APP & WIFI TECHNOLOGY

2 different body styles: A and B.

CUBE

Snow White

Onyx Black

Stainless Steel

Azure Lake

Candy Pink

Matcha Green

Yolk Yellow

Racing Red

_ Cube A

In style A, the machine coating panels come in single colour.

Standard colours

Special colours

_ Cube B

In style B, the side panels feature two parts characterised by a two-colour finish.

Available finishes of the body

Available finishes for the central box

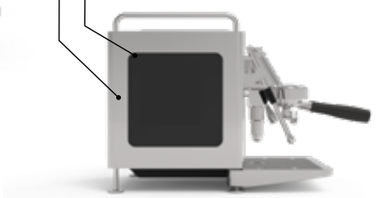

You

CUSTOMIZABLE PRESETS

USER-FRIENDLY
Intuitive touch screen display

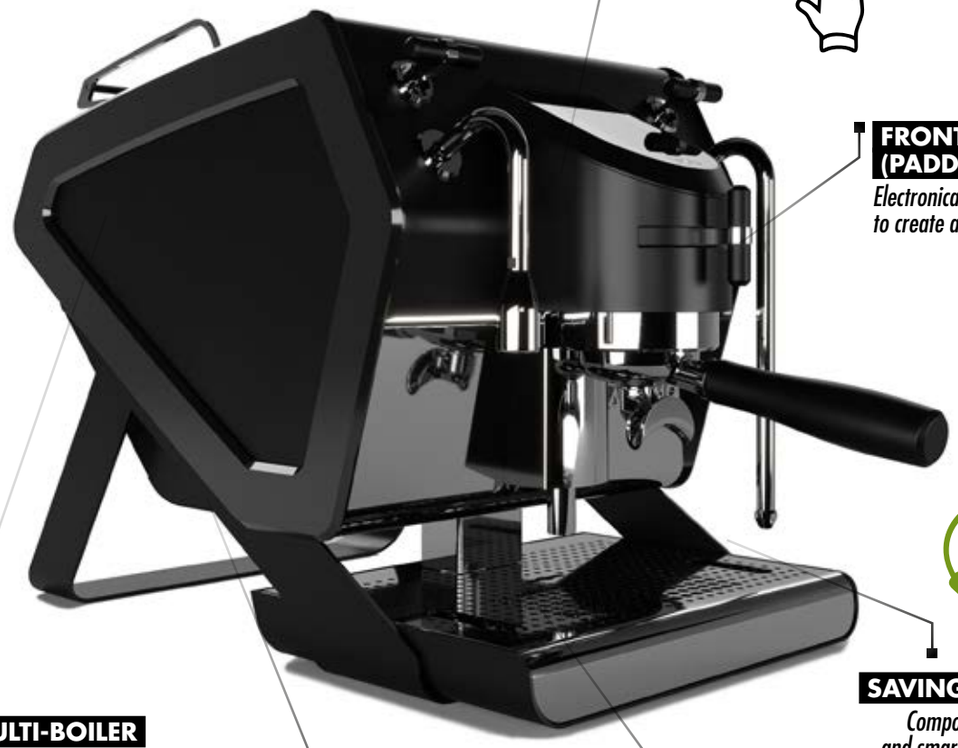

FRONT LEVER (PADDLE)
Electronically managed to create and modify profiles

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency

MULTI-BOILER
The boilers for both the coffee and the auxiliary services are made from AISI 316 stainless steel, and are fully insulated

FULL CONFIGURATION
Equipped with tank (2,5l) and water mains connection

CONNECTIVITY
USB and Wifi

VOLUMETRIC PUMP
70 litre 24V
Excellent stability during pressure/flow profiling

(*) Flow mode and WiFi module during the year 2022

_Characteristics

LED LIGHTING OF THE WORK AREA
Allows efficient working in any condition of environmental lighting.

ENERGY SAVING SYSTEM
Component insulation and smart electronics for maximum energy efficiency.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.

AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION
Programmable ON-OFF/ON-ECO timer for each day and/or daily timetables.

TEMPCONTROL
For a very-high thermal stability (± 0.2 °C).

STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

GROUP FLUSHING
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

STAINLESS STEEL COFFEE BOILER
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

AUTOMATIC CLEANING CYCLE
Process for coffee group cleaning.

VOLUMETRIC PUMP
A new generation rated 70 L/h for pressure and flow profiling

YOU
SANREMO

_Versions

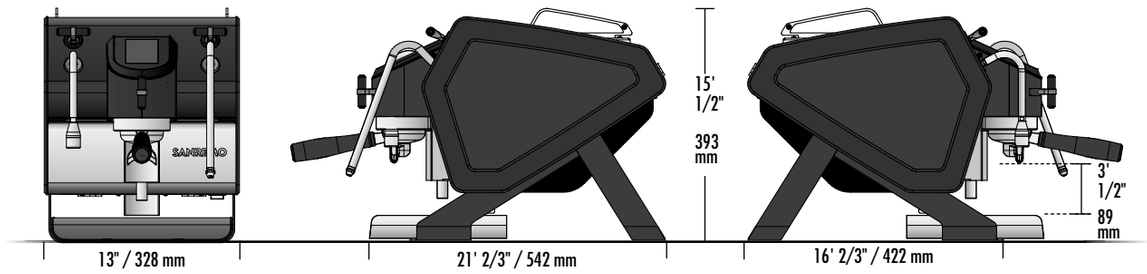

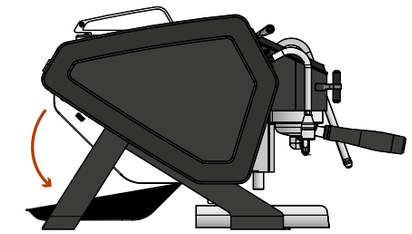

CE

_Technical data

voltage/max input boiler	V	120V 50-60 Hz / 1.65 kW
coffee boiler's resistor power	W	500
steam boiler capacity	lt	1
coffee boiler capacity	l	0.5
net weight	lb / kg	70.5 / 32
gross weight	lb / kg	79 / 36

_Colors

	Black: matt|glossy (frames)	RAL 9005
	White: matt|glossy (frames) legs and side	RAL 9003 RAL 8019
	Custom: Side panels in leather or wood Knob lever and wooden paddle lever	

Custom kits in leather and wood available soon, check on our website.

You
Watch the video

_ Customizable Presets

Extraction profiles customizable and savable:
- **6 standard profiles** with optimal parameters presets
- **12 completely customizable profiles** in all 3 extraction phases, with a capacity to disable pre-infusion and post-infusion the Paddle
- **set your manual profiles from the Paddle**

_ Extraction Mode

Set your extraction profiles in **Pressure** or **Flow** mode.(*)

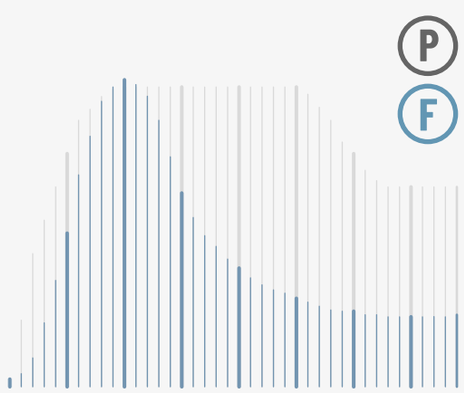

(*) Flow mode and WiFi module during the year 2022

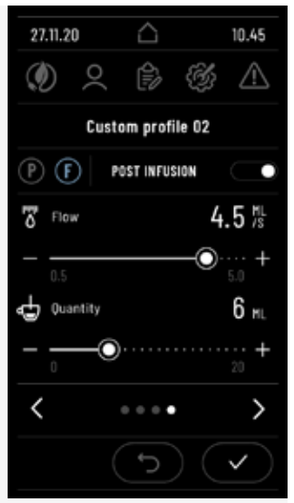



_ Electronic Paddle

Manually create your profiles in both extraction modes.

Configure the Paddle (right/left) based on your gestures.



YOU

MADE FOR YOU BY SANREMO

"ON THE FLY" function to correct the flow/pressure parameters in real time during your extraction process.

_ Energy Efficiency

Setting:
- **Automatic**: allows the user to associate up to 6 daily time frames.
- **Manual**: allows the user to turn the machine or the individual boilers on and off manually.

Two programmable modes:
- **Stand-by**: low power consumption condition, compliant with the ErP Directive (2009/125/EC).
- **Eco**: keeps the machine on, but at a reduced temperature for quick start-up.

For both, the user can enable the Energy Saving function, which automatically turns the machine off after the set time.

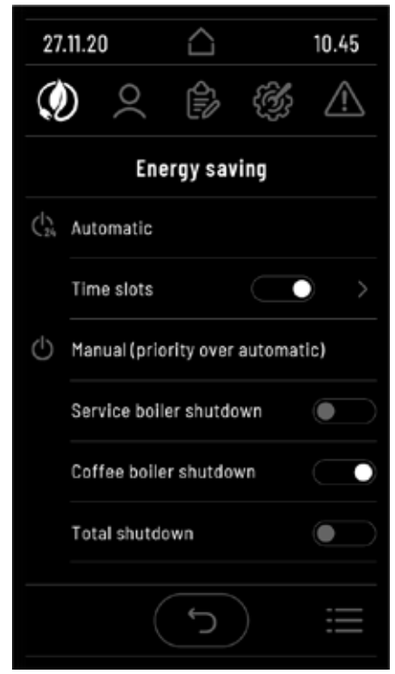

Grinders

On demand / Grinder doser

SR 83 OD

_Colors

	Black	RAL 9017
	Silver	RAL 9006
	White	RAL 9003

_Technical data

		SR 83 OD
power	W	650
burrs	-	flat
disks diameter	inch / mm	3' 1/4" / 83
motor speed 50 Hz	rmp	1350
motor speed 60 Hz	rmp	1550
coffee beans hopper capacity	lb / kg	3.3 / 1.5
net weight	lb / kg	33 / 15
width	inch / mm	9" / 230
height	inch / mm	26' 2/4" / 670
dept	inch / mm	10' 3/4" / 270

On demand / Grinder doser

SR 64 OD

_Technical data

		SR 64 OD
power	W	350
burrs	-	flat
burrs diameter	inch / mm	2" 2/4" / 64
motor speed 50 Hz	rmp	1350
motor speed 60 Hz	rmp	1550
coffee beans hopper capacity	lb / kg	3.3 / 1.5
net weight	lb / kg	28 / 13
width	inch / mm	9" / 230
height	inch / mm	24' 1/4" / 615
dept	inch / mm	10' 3/4" / 270

Inverter technology

INVERTER TECHNOLOGY

The system ensures absolute precision and consistency for grinding, reducing motor consuntion, operating noiselessly and showing exceptional realiability even during long time operations.

Grinders
Link to the website

AllGround

_CUBE Grinders AllGround

Snow White

Onyx Black

Stainless Steel

Azure Lake

Candy Pink

Matcha Green

Yolk Yellow

Racing Red

CE

_Technical data

power	W	250
burrs	-	flat with titanium coating
burrs diameter	inch / mm	2' 2/4" / 64
motor speed 50 Hz	rmp	1400
motor speed 60 Hz	rmp	1600
coffee beans hopper capacity	lb / kg	0.55 / 0.25
net weight	lb / kg	19.8 / 9
width	inch / mm	6' 3/4" / 169
height	inch / mm	17' 1/4" / 440
dept	inch / mm	9' 2/4" / 240

made for
each other

_Notes

_Notes

_Notes

All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.

For more information about our coffee machines please contact us at *export@sanremomachines.com*

SANREMO
COFFEEMACHINES

Sanremo Coffee Machines s.r.l.
Via Giacomo Bortolan 52
31050 Vascon di Carbonera [TV] – ITALY
T +39 0422 448900
F +39 0422 448935
www.sanremomachines.com

Sanremo Coffee Machines USA, Inc
99 Grand Street, Unit 20, Moonachie,
New Jersey 07074 – USA
T +1 973 907 3013
alessio.t@sanremous.com
www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System according to UNI EN ISO 9001:2015 standard.